

APPROVAL SHEET

To :

Customer P/N :

UDE P/N : SA00-ZZ-0002

Description : SFP Connector

Right Angle;SMT

Contact Area : 15 μ " Gold

Solder Tail : 100 μ " min. Matte Tin

Packing with Tape Reel



Spec No.	Update Date	Revision
SA0020002-00	2020/12/25	C

Approved	Checked	Prepared



湧德電子 股份有限公司
UDE Corp.

桃園市(33852) 蘆竹區內溪路 68 巷13號

No.13, Ln. 68, Neixi Rd., Luzhu Dist., Taoyuan City (33852), Taiwan





TEL: 886-3-3242000 FAX: 886-3-3246611

<http://www.ude-corp.com/>

1. MECHANICAL DIMENSION

1.1 Product Dimension


General Tolerance : X.X : ± 0.25
X.XX : ± 0.13

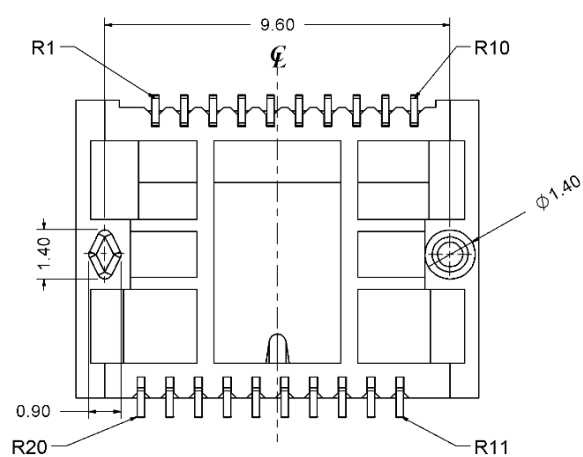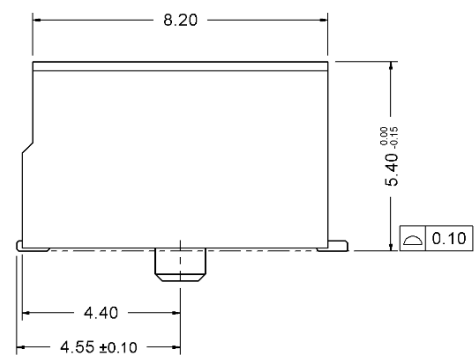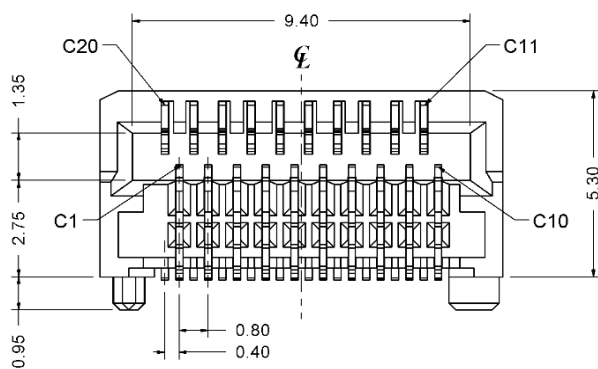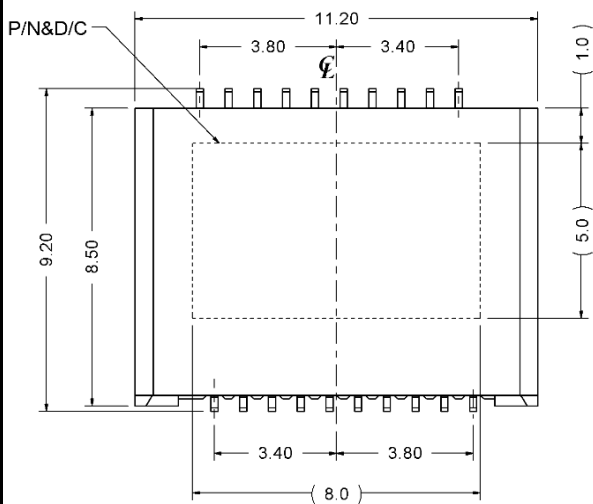

1.2 Recommended PCB Layout

Component Side of Board

All dimension tolerances are $\pm 0.05\text{mm}$ unless otherwise specified

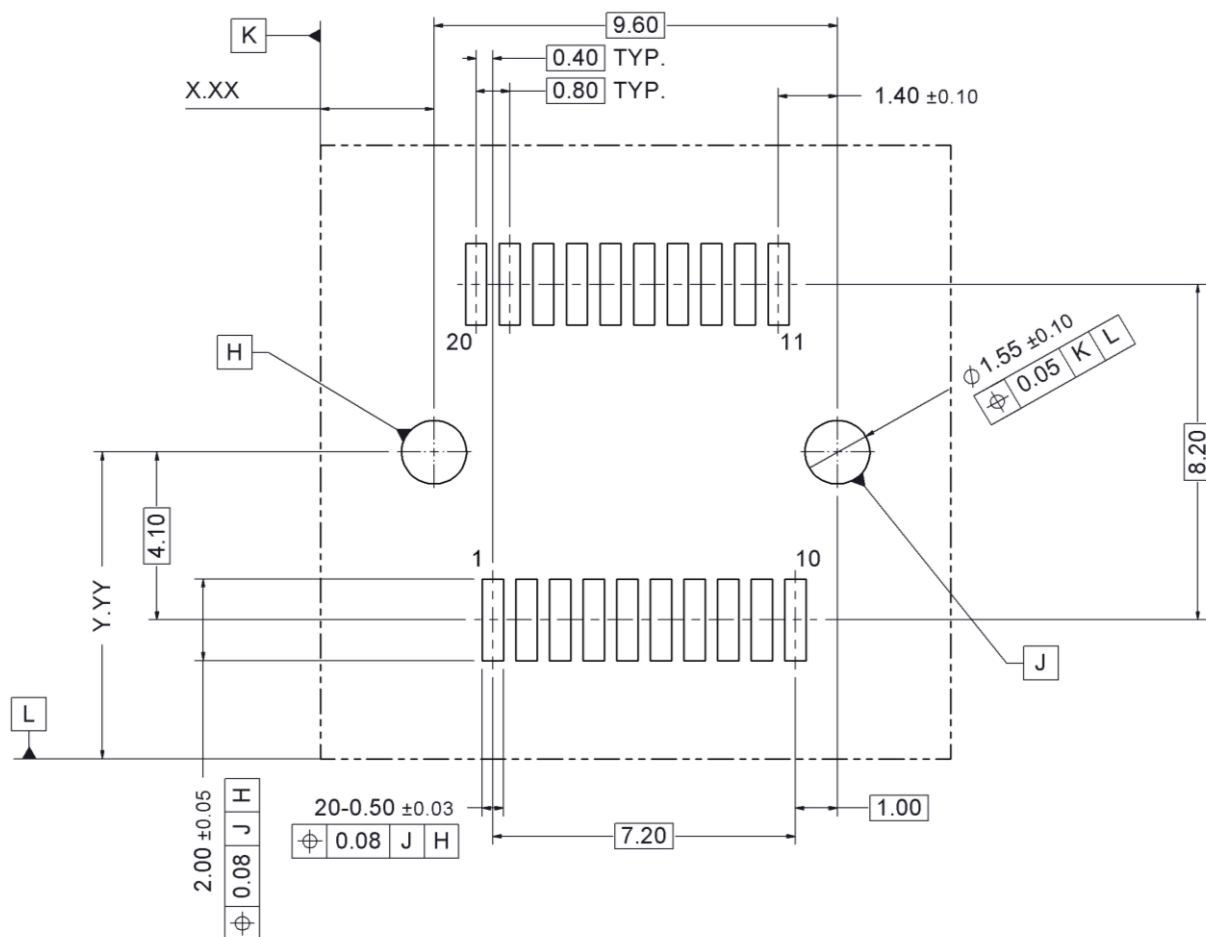

1.3 Packing Information

569 pcs finished goods per reel

10 carries (5690 pcs finished goods) per box

2. REQUIREMENTS

2.1 Design and Construction

Product shall be of design, construction and physical dimensions specified on applicable.

2.2 Material

2.2.1 Terminal Parts (Underplating : 50μ" min. Nickel overall)

2.2.1.1 Terminal : PH. Bronze, Thickness=0.20mm

Finish : Contact Area : 15μ" Gold

Solder Tail : 100μ" min. Matte Tin

2.2.2 Plastic Parts

2.2.2.1 Housing : LCP, Black <UL94V-0>

2.3 Operating and Storage Temperature

Operating Temperature : -40°C to +85°C

Storage Temperature : -20°C to +85°C

2.4 SFP 1X Connector specifications

Contact Current Rating: 0.5A (per contact)

Insulation Resistance 1000MΩ min.

Dielectric Withstanding Voltage : 300VDC @1min.

Insertion force : 40N MAX.

Extraction force : 12.5N MAX.

Durability : 100 cycles MIN.

2.5 Performance and Test Description

Product is designed to meet electrical, mechanical and environmental performance requirements specified in below table. All tests are performed at ambient environmental conditions per MIL-STD-1344A and EIA-364 unless otherwise specified.


2.6 Packaging and Packing

All parts shall be packaged and packed to protect against physical damage, corrosion and deterioration during shipment and storage.

3. IR REFLOW TEMPERATURE PROFILE

Temperature condition of reflow soldering

Contents	Soldering Condition
A : Increasing speed	$3 \pm 1^\circ\text{C}/\text{sec}$
B : Pre-heat starting Temp	150°C
C : Pre-heat ending Temp	180°C
D : Pre-heat interval	120 sec or over
E : Over 217°C time	60 ~ 150 sec
F : Peak Temperature	$260 \pm 5^\circ\text{C}$ max.

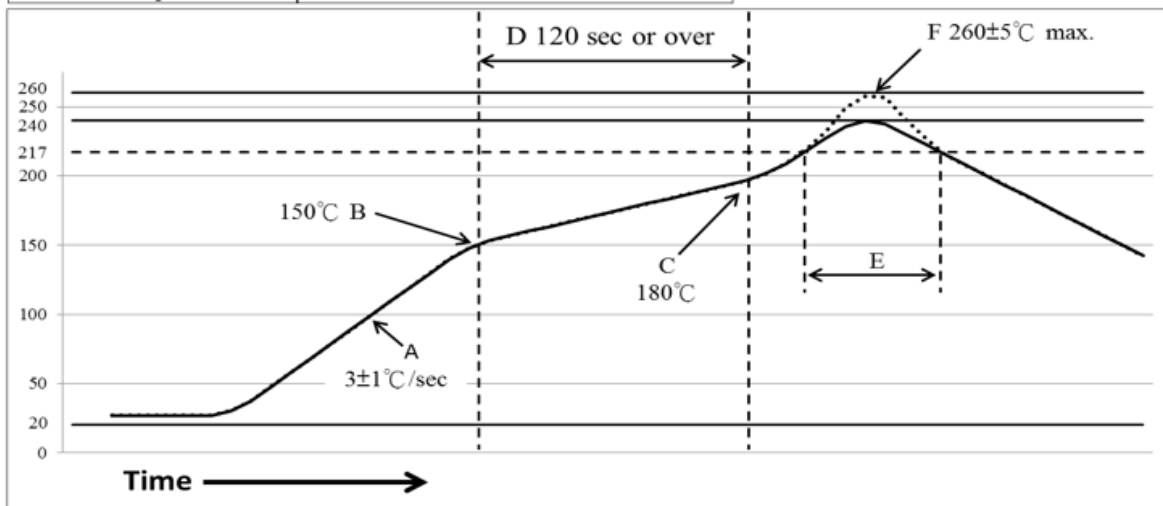

Type of lead-free solder should be 96.5Sn-3.0Ag-0.5Cu or 99.3Sn-0.7Cu.

4. Revision History

[illegible]